

MODEL 1500

Hazardous Area Thermoelectric Generator



The Model 1500 Thermoelectric Generator is Class 1, Div 2 hazardous area rated. With no moving parts, it is a reliable, low maintenance source of DC electrical power for any application where regular utilities are unavailable or unreliable.

KEY DESIGN FEATURES:

- ✓ Automatic Spark Ignition (SI)
- ✓ Automatic Fuel Shut-Off (SO)
- ✓ Fuel Filter
- ✓ Low Voltage Alarm Contacts (VSR)
- ✓ CSA Certification
- ✓ Reverse Current Protection
- ✓ Class 1, Div 2, Group D, Temp T3
- ✓ Volt & Amp Meter
- ✓ Flame Arrestor



Specification Sheet

Power Specifications	Power Rating at 20°C:
----------------------	-----------------------

500 Watts @ 24 Volts

Electrical	Output Adjustment Range:
------------	--------------------------

24 V 24-30 Volts

Output: Terminal block which accepts up to 00 AWG wire.
Opening for two 3/4" conduit in base of cabinet.

Fuel Requirements	Natural Gas:
-------------------	--------------

48.0m³/day (1695 Sft³/day)
1000 BTU/Sft³ (37.7 MJ/Sm³) gas
max 115 mg/Sm³ (~170 ppmw) H₂S
max 120 mg/Sm³ H₂O
max 1% free O₂

Propane:

n/a at this time

Max. Supply Pressure: 172 kPa (25 psi)

Min. Supply Pressure: 103 kPa (15 psi)

Fuel Connection: 1/4" MNPT

Environmental	Ambient Operating Temperature:
---------------	--------------------------------

Max. +45°C (115°F)

Min. -40°C (-40°F)

Operating Conditions:

Unsheltered operation

Please contact GPT for operating conditions below -40°C or above +45°C.

Construction	Materials:
--------------	------------

Cabinet: 316 Stainless Steel (SS)

Cooling Type: Natural Convection

Fuel System: Aluminum & Stainless Steel

Note:

Specifications shown are for standard 1500 configurations. Global Power Technologies (GPT) also offers customized products and systems to accommodate custom voltages, fuel supply systems and operating temperatures.

Specification data stated in this document is subject to change without notice. To verify these specifications are current, please contact your GPT sales representative.

P 403 236 5556



E gptsales@globalte.com

W www.globalte.com

Thermoelectric Generator

Model 1500

ISO
9001:2008
REGISTERED

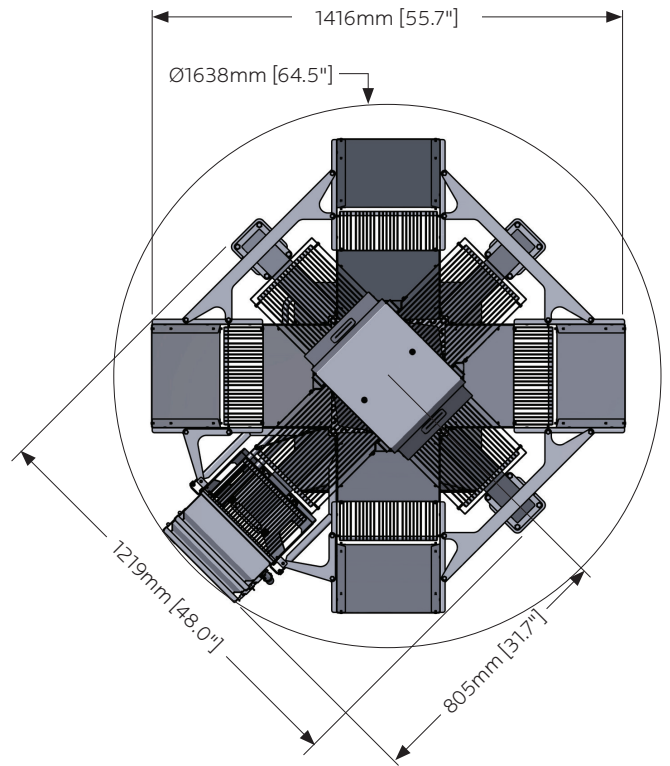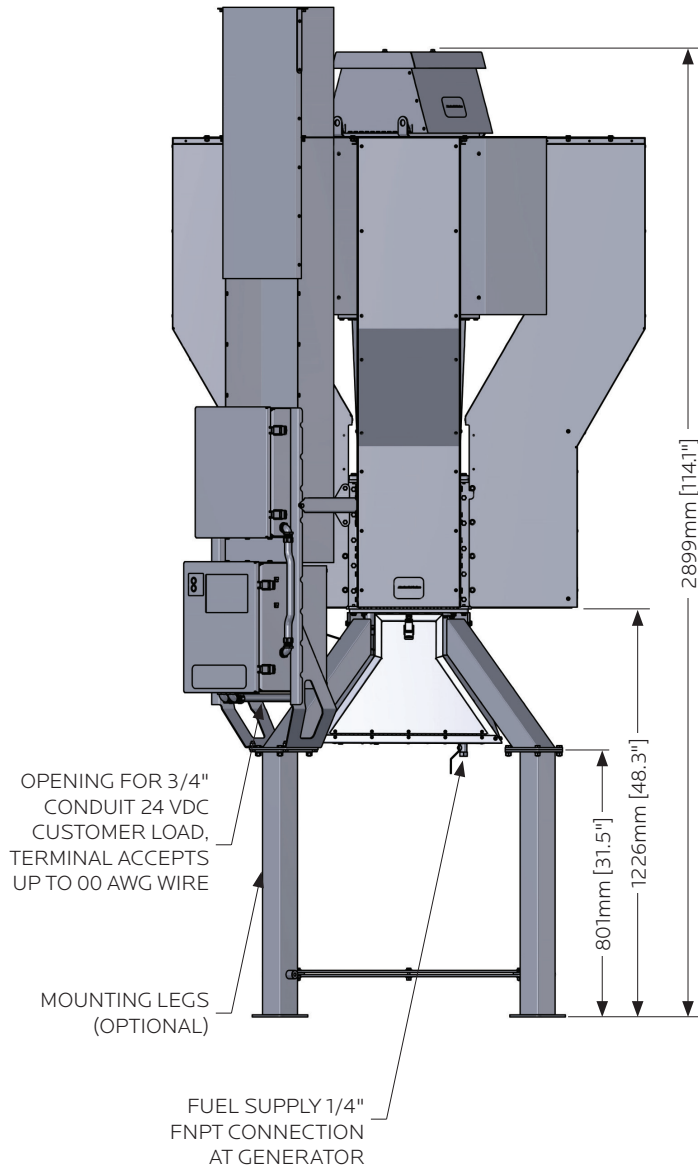

NOTES:

Generator Weight: 700 kg [1530 lb]

Model: 1500



Global Power Technologies

p 403 236 5556

e gptsales@globalte.com

w globalte.com

16, 7875 – 57 Street SE
Calgary, Alberta, Canada T2C 5K7

Typical Dimensions

Model 1500

ISO
9001:2008
REGISTERED